


# Installation Guide

## Case components

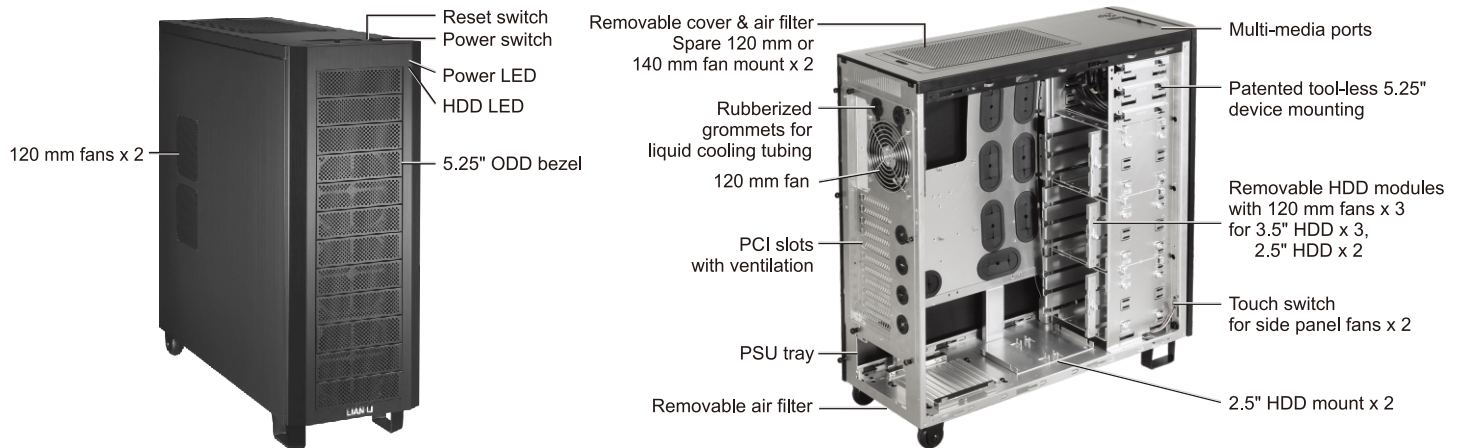


## Hardware list


\*Extra quantities are spare parts.

	Buzzer (1)		Anti-vibration silica gel rings (45) for 2.5" HDD / 3.5" HDD		Aluminum handle (9) for 3.5" HDD		Lock latch (1)
	USB 3.0 to USB 2.0 converter (1)		Shorter thumb screws (9) for motherboard mount		Thumb screws (37) for 3.5" HDD		Screws (2) lock latch
	Cable ties (3)		Longer thumb screws (3) for motherboard mount		Screws M3*9.5 (8) for 2.5" HDD		Clamp (1)
	Screw driver (1) to ass'y motherboard		Screws (5) for PSU mounting		Screws (24) for 2.5" HDD		Box (1) for spare parts
	Stand off bolt (3) for motherboard		3-pin to 4-pin power-cord converter (3) for fan		Thumb screws (6) for ODD		


## Remove side panel

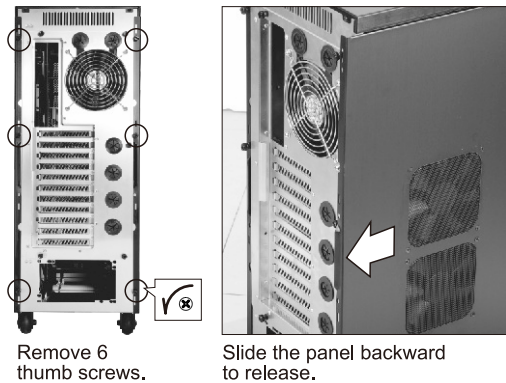


## Motherboard installation

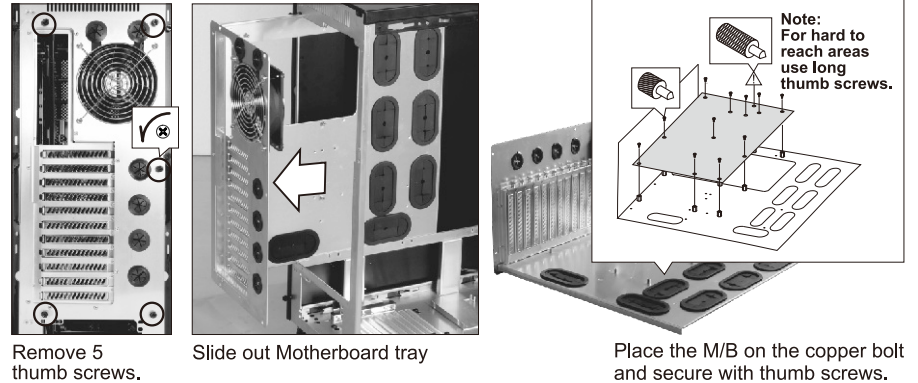


## Remove front panel




## Remove 5.25" bezel

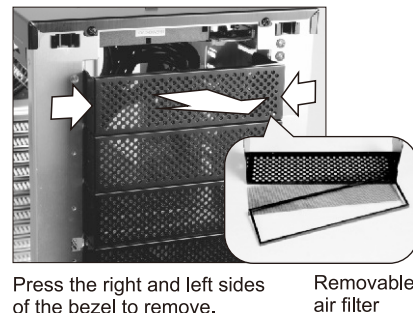


## ODD installation

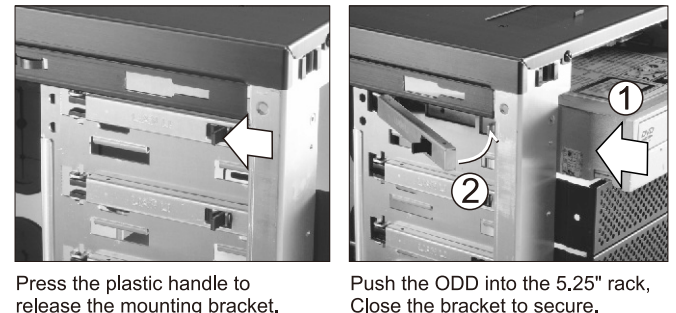


## PSU installation

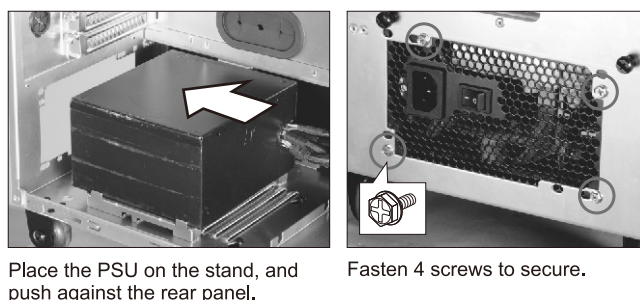


## Lock latch installation

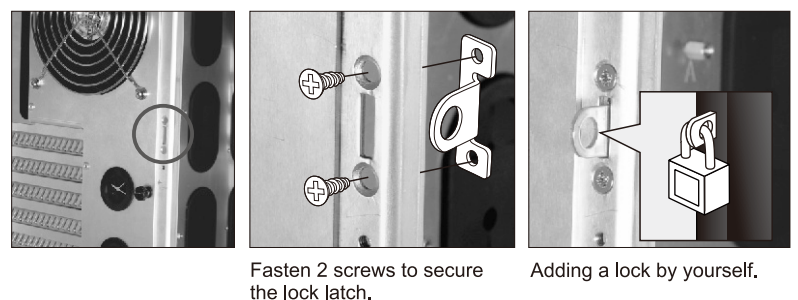


### 3.5" HDD installation

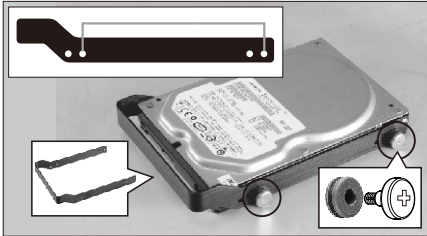

Fasten the HDD screws with anti-vibration silica gel rings to the HDD.




Slide the HDD into the HDD cage.




Slide down the thumb screw to secure the HDD.

### Remove bottom air filter




Slide the air filter to remove.


### Remove HDD cage



Release the HDD cages by loosening the 8 screws.




### 2.5" HDD installation-1



Fasten the HDD on the top of the cage with 4 screws.

### 2.5" HDD installation-2



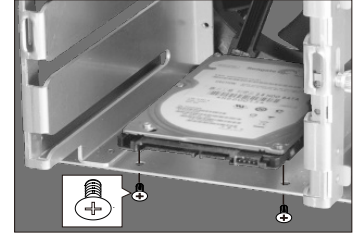


Fasten the HDD at the bottom of the cage with 4 screws.


### Option kits:




### Optional hot swap backplane (BP3SATA) & HDD module panel (BZ-503)



### 2.5" HDD installation-3




Fasten the HDD screws with anti-vibration silica gel rings to the HDD.



Put the HDD into place on the HDD tray.

### Cable management




Press to release.




### Cable installation guide

BLACK / WHITE - BLACK +	POWER SW
BLACK / WHITE - BLACK +	RESET SW
BLACK / WHITE - BLACK +	POWER LED
BLACK +	POWER LED
BLACK / WHITE - BLACK +	HDD LED
RED+ NC NC Blue	SPEAKER


### Remove air filter




Push to release the cover & air filter.



### Supports water cooling radiator




Remove 4 screws to release the fan panel.





Option kit: 120 mm fans or 140 mm fans

Fasten the fan on the fan panel with screws (from option).




### I/O port installation




### HD AUDIO

Blue	10		9	Green	
Black	purple	8		7	Key
Yellow	6		5	Orange	
Gary	4		3	N.C.	
Red	2		1	GND+H.S. TUBE	



### E-SATA

SATA Cable



### USB 3.0 to USB 2.0 converter

